

VOLTEC Prox Punch

Applications:

Offices, Computer Rooms, Bank & Building societies, Hospital, Gate lift, Airports, Universities, Factories, Block main entrances, shops, Sensitive areas, Parking Control...etc.

With imaginable & comfortable and convenient for your daily life.


● access controller

● Intelligent On/Off-line proximity time attendance

● PP-3760


Features:

- With built-in quartz real time clock for time zone control & time recording.
- With tamper switch and two loop sensor input to trigger alarm when case is tampered or loop is intruded.
- Free definition of elevator map for persons (optional Digital output for PLC).
- Mix personal mode, Anti-pass back function.
- DC 12V operated therefore battery operated by possible when AC power is interrupted.
- Up to 6,000 (optional for 9,999) Attendance/Access transaction and 9,999 personal map with 32 time zones. 8 times for Free Access, 8 times for Auto duty, 8 times for Auto Mode.
- 10 years for real time clock and transaction data retention at power failure. CMOS CPU with low power consumption & watchdog function.
- With RS-232C RS-422 or RS-485 interfaces for polling configuration up to hundreds of readers. All models with unique communication protocols to be controlled by one PC Computer through .
- Totally 144 alarm schedules (6 schedules per hour) controlled outputs for music or siren output.
- Totally 365 holidays for national holidays and long term vacations.
- Card add/delete can be executed differently block by block for CARD or CARD & PIN, or PIN only from person to person.
- Windows software supported the networking system.
- With complete series of electric strikes, electro-magnetic locks to support different access application.

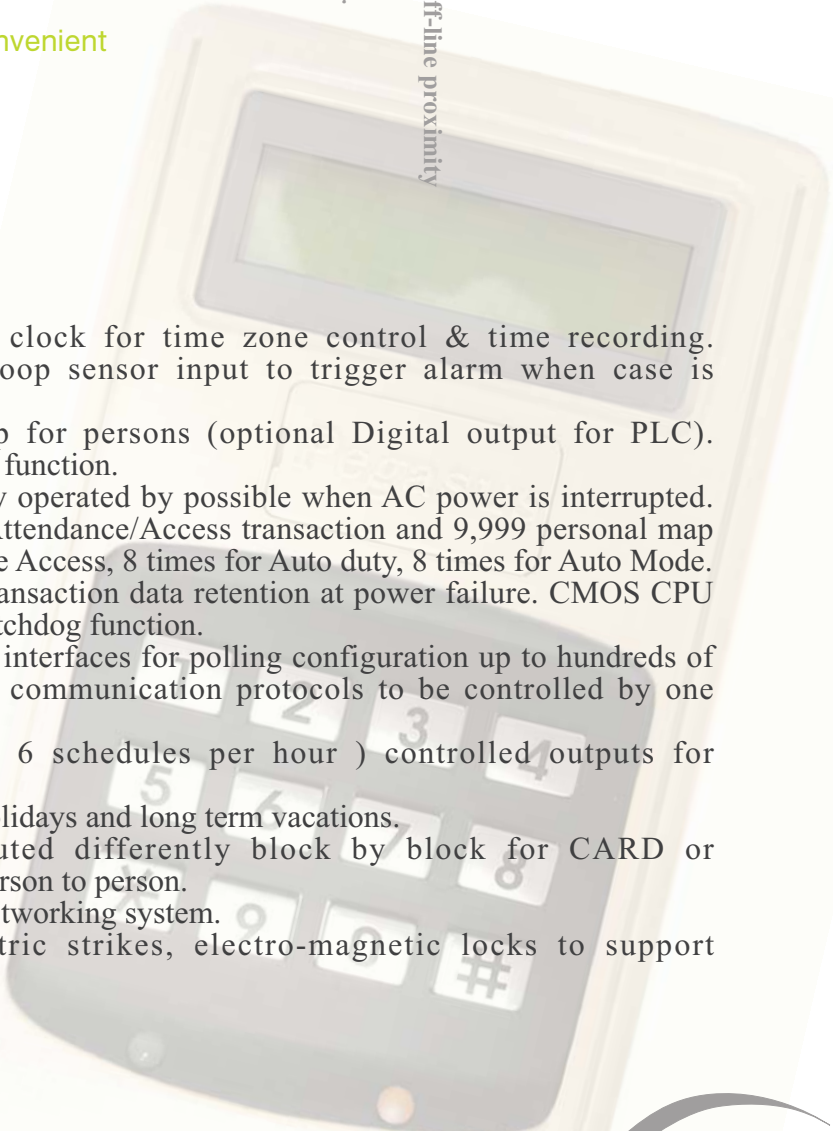

VOLTEC
Electronics

VOLTEC Prox Punch

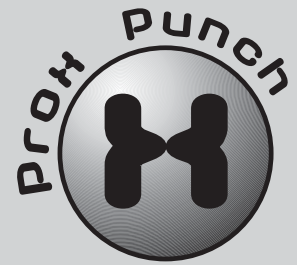

● 12 V DC

● Specifications



Acces	Valid acces granted in less than 10~15cm
Mounting	Surface mount
On-line	RS-232, RS-422 or RS-485, wiegand output
Transmission rate	300-19, 200 bps, N,8,1 (default 4,800 bps)
Power source	12V DC
Operating technologies	Fully completed Acces control & Time attendance functions
Display	With 16 x 2 lines LCD to display weekday, time, ID number date, buffer counter...etc.
Keypad	4 x 3 metallic or membrane keypad for system programming, pass word entry of duty code selection
Reset	Watchdog timer, power reset, self recovery wathcdog(optional)
Indicators	LED's (one bicolor and one yellow) and buzzer for sound indication
Passcode	Programmable 4 digits PIN. for each person
Passive cards/ key tags	PG-PROXC-D/44 "D" type prx> cards PG-PROXC-D1/44 "D" blank type prox. cards PG-PROXC-H/44 "H" type prox. cards PG-PROXC-H1/44 "H" blank type prox. cards
Operation temperature	0° C ~ 50° C
Humidity	20%~90% RH, Non condensation
Dimensions	174(L)x 100(W)x 45(H)mm
Weight	0.8Kg ±5%

